

ARISTOMAT TL - High Speed Cutter of the new Generation

Clear designed cutting table

Impresses with its functional design and concentration on the basic essentials: a from all sides freely accessible work surface, extremely robust traverse bridge with minimal protruding at the sides and belt drive in all axis for slip-free drive. Powerful AC-servomotors and the modern CAN-Bus-steering technique enable the high throughput

Powerful vacuum technique

Up to 54 controllable vacuum zones hold even the smallest of remnants safely on the work surface.

Simple operating


With the easy-to-use operable *CutterControlPanel* software, available in many languages, the ARISTOMAT cutters are controlled from PC. The windows user interface offers the user all graphical informations of the cutting data. With the mobile control pad essential functions such as navigation or setting the origin allow an effective operation.


Various tool heads

Combinable single and multi-functional tool heads with tangentially controlled tool holders and a large number of precision tools, offer the possibility of a varied choice of materials to process. This variety of possibilities for material processing can be supplemented with the automatic measuring system *AutomaticEye* and the providing of data via mobile barcode reader.

Material transport

To automate the processing, the machines can be supplemented with a revolving conveyor, a powered unwinding device for continual material transportation of roll materials. The machines also can be converted to *ProductionLineCutters* (PLC) with integrated loading and/or unloading table.

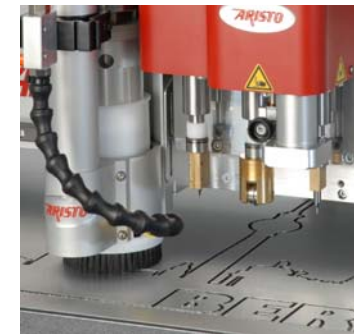

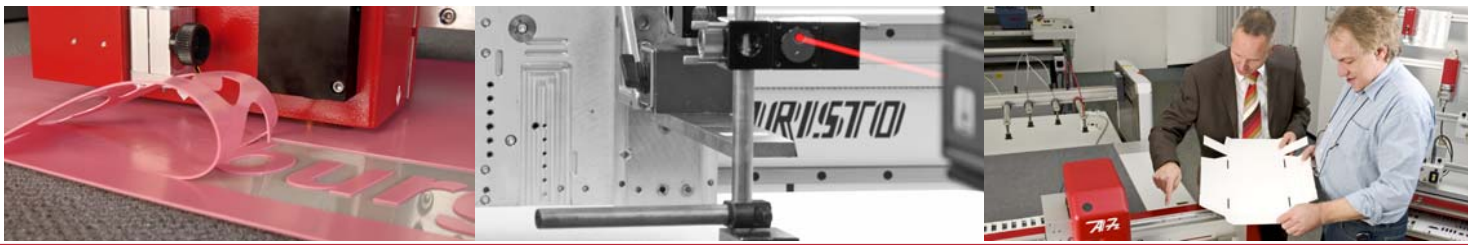

Specifications ARISTOMAT TL

ARISTOMAT	Travels ¹⁾ (WxL) mm (inch)		Outer dimensions ²⁾ (WxL) mm (inch)		Speed ³⁾ adjustable via software	Acceleration ³⁾
	without conveyor	with conveyor	without conveyor	with conveyor		
TL 1310	1300 x 1000 (51 x 40)	1220 x 1000 (48 x 40)	1920 x 1760 (76 x 69)	1920 x 2140 (76 x 84)	max. 1130 mm/s max. (45 in/sec)	max. 1.15 G max. 1.15 G
TL 1317	1300 x 1700 (51 x 67)	1220 x 1700 (48 x 67)	1920 x 2420 (76 x 95)	1920 x 2800 (76 x 110)	max. 1130 mm/s max. (45 in/sec)	max. 1.15 G max. 1.15 G
TL 1617	1600 x 1700 (63 x 67)	1520 x 1700 (60 x 67)	2220 x 2420 (87 x 95)	2220 x 2800 (87 x 110)	max. 1130 mm/s max. (45 in/sec)	max. 1.15 G max. 1.15 G
TL 1625	1600 x 2500 (63 x 98)	1520 x 2500 (60 x 98)	2220 x 3220 (87 x 127)	2220 x 3600 (87 x 142)	max. 1130 mm/s max. (45 in/sec)	max. 1.15 G max. 1.15 G
TL 1917	1900 x 1700 (75 x 67)	1820 x 1700 (72 x 67)	2520 x 2420 (99 x 95)	2520 x 2800 (99 x 110)	max. 1130 mm/s max. (45 in/sec)	max. 1.15 G max. 1.15 G
TL 1925	1900 x 2500 (75 x 98)	1820 x 2500 (72 x 98)	2520 x 3220 (99 x 127)	2520 x 3600 (99 x 142)	max. 1130 mm/s max. (45 in/sec)	max. 1.15 G max. 1.15 G

Material clearance thickness	max. 46 mm (max. 1.8 inch) depending on the tool head and protective underlay
Input buffer	PC controlled
Static repeatability	± 0.02 mm/m @ 20° C (0.008 inch @ 68° F)
Control circuit and drives	Digital AC servo motors
Data format	HPGL compatible, with extended command set
Vacuum	Adjustable matrix vacuum zones
Power supply³⁾	3-phase fixed connection, 400V, 50Hz
Operating	ARISTO control software for Windows Version 7, 8, 10 (32 bit / 64 bit) Various selectable languages. Mobile control pad.
Ambient conditions	
operating temperatur	+10°C up to +30°C (50°F up to 86°F)
storage temperatur	-15°C up to +45°C (5°F up to 113°F)
rel. humidity	40 - 80% non-condensing
Safety / Certification	CE-label; Emergency stop; Light barrier; Collision shut-off

Options

- ✓ Conveyor system with integrated unloading table (PLC-Machine)
- ✓ Motorized and manually winding and unwinding devices for roll materials
- ✓ Material clamp system
- ✓ Various combinable tool heads
- ✓ Data base *CutRecall* for saving, calling and editing of all process parameters
- ✓ Intelligent camera system *AutomaticEye* for accurate assignment and scaling of prints
- ✓ Mobile *BarcodeReader* for automatic process identification
- ✓ Projection of the cutting outline onto the material

- 1) Complies with the max. work area for one tool. Further tools reduce the max. work width.
- 2) The dimensions only refer to the basic machine.
- 3) Depending on the cutter size, cutter configuration and tool head.

